



SOLARIS

PRELIMINARY

CF-35 Strobe

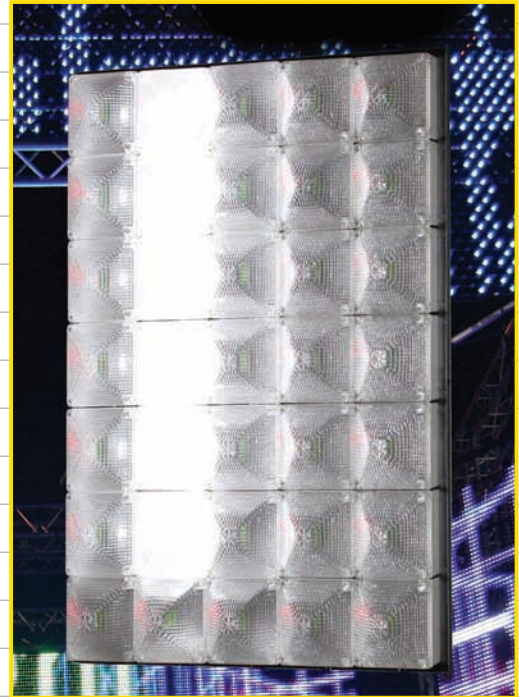

- 35 Joule flash energy, visible for miles
- DMX controlled – 1 channel per fixture
- Automatic addressing
- Opto isolated DMX input, buffered output
- Impact resistant polycarbonate housing, IP67, UV resistant
- Input voltage 200~250VAC, 50/60 Hz, 0.4A

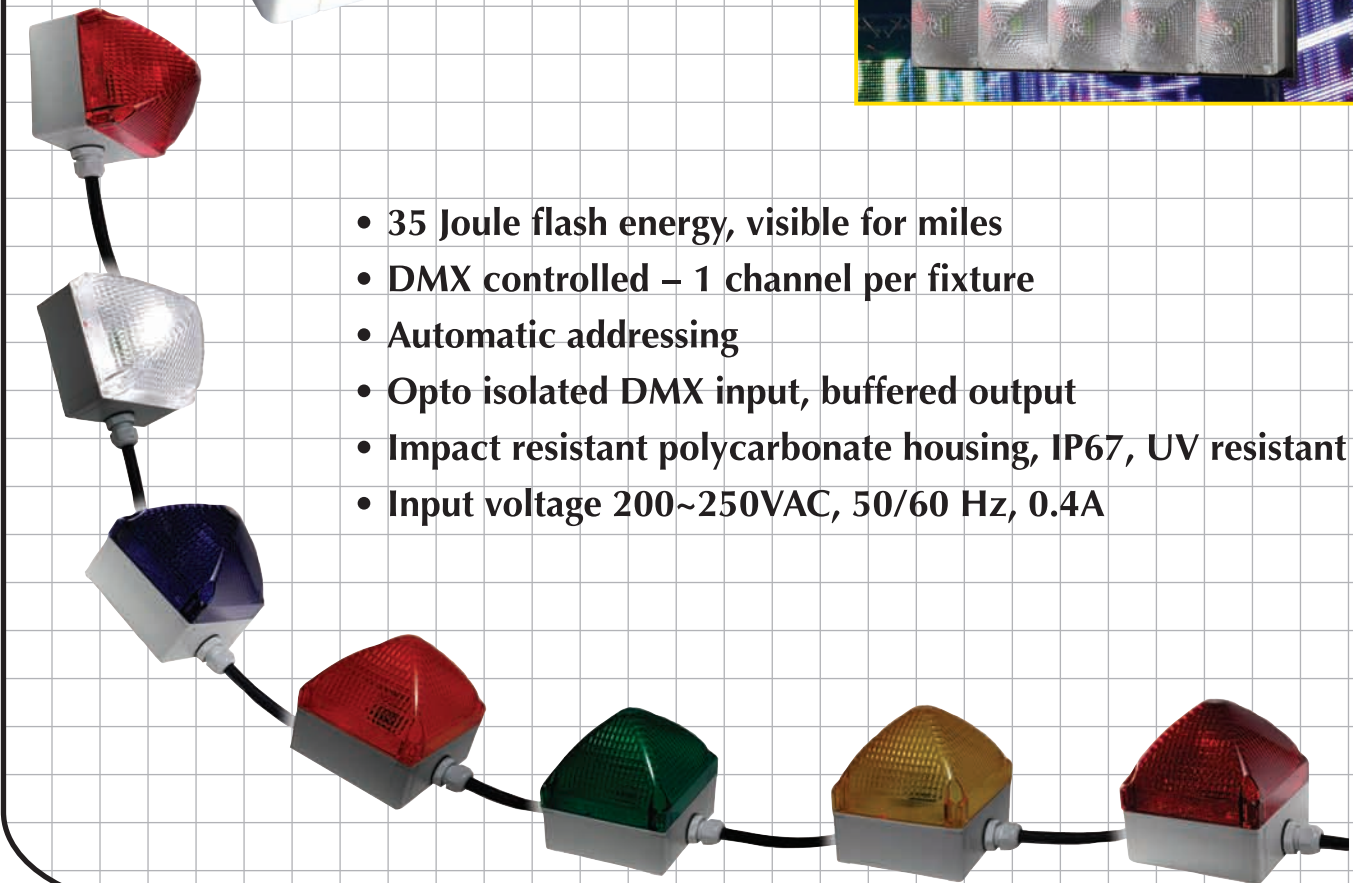

LITSOLACF35A4-042109



LOS ANGELES

10643 Glenoaks Blvd.
Pacoima, CA 91331
USA

Tel: +1 818.899.8818
Fax: +1 818.899.8813

LONDON

21 Armstrong Way
Southall
UB2 4SD England

Tel: +44 (0)20.8574.9700
Fax: +44 (0)20.8574.9701

NEW YORK

100 Asia Place
Carlstadt, NJ 07072
USA

Tel: +1 201.896.8600
Fax: +1 201.896.8601

BEIJING

No. 309, Building 6
Sanlitun Nanlu
Chaoyang District
Beijing, China 100027

Tel: +86 10.8492.1587
Fax: +86 10.8492.7635

TORONTO

409 Saddle St. West
Box 654, Durham
Ontario N0G-1R0

Tel: +1 519.369.9990
Fax: +1 519.369.9992