


# SOLARIS

## QUASAR 15K

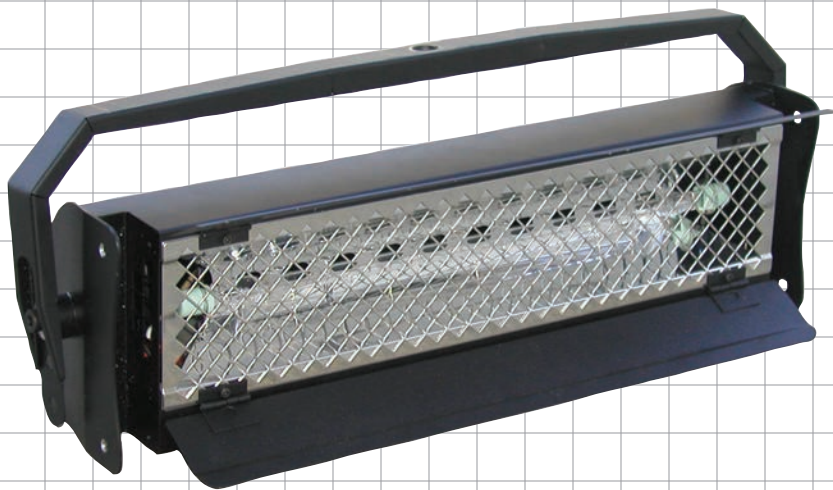

## 15,000 WATT PROFESSIONAL STROBES

Versatile strobes that can be used anywhere either flash or constant light is required. Ideal for theatre, concert, dance club, and rental company applications. No comparable strobe in the world!

### FEATURES

- 450,000 lumens maximum output!
- DMX512 control with RDM.
- LumenRadio™ wireless control available as built-in option.
- Continuous lighting capability (120Hz).
- Automatically controlled electronic safety feature.
- Auto voltage sensing.
- Thermal shut-down feature.
- Highly accurate flashing system.
- Three phase system capability.
- Compact size.
- SELF-Test functions, LED indicators.
- Optional controllers can execute pre-programmed or customized lightning sequences at the push of a button or triggered via DMX512.

NOW WITH



AVAILABLE WITH



Production Supplies & Services Worldwide

tmb-info@tmb.com

LOS ANGELES

LONDON

NEW YORK

BEIJING

TORONTO

Tel: +1 818.899.8818

Tel: +44 (0)20.8574.9700

Tel: +1 201.896.8600

Tel: +86 10.8492.1587

Tel: +1 519.369.9990

© TMB

# QUASAR 15K SPECIFICATIONS

<b>LAMP</b>	Maximum continuous flash discharge	2.5 seconds	
	Frequency of continuous mode	120 Hz	
	Flash tube type	Proprietary Long Arc Xenon tube	
	Color temperature	5600° Kelvin	
<b>CONTROL PARAMETERS</b>	Intensity control		
	Adjustable flash frequency		
<b>ELECTRONIC &amp; SAFETY DEVICES</b>	Overheating protection	80°C, 110 °C, self resetting	
	Self-test	Preprogrammed	
	Indicator LED'S	Red: POWER Yellow: MODE/PROTECTION Green: DATA	
<b>CONTROL SYSTEM</b>	Digital display and pushbutton programming of parameters		
	Number of channels	2	
	Connection type	5-Pin XLR	
	Supported Protocols	DMX512, RDM, optional LumenRadio wireless	
<b>POWER SUPPLY</b>	Nominal mains voltage	190-260 VAC, 50-60 Hz	
	Power requirement	20A breaker	
	Max. power draw	Continuous	60A
		Turbo	32A
<b>FIXTURE &amp; HOUSING</b>	Protection from breaking flash tube	Soft spring suspension system	
	Fixing	Adjustable yoke	
	Corrosion protection	Aluminum body	
	Unit Dimensions (HxWxD)	7.5" x 21.5" x 5.5" / 19 x 54.6 x 14 cm	
	Shipping Dimensions (HxWxD)	10.5" x 23.75" x 9" / 27 x 60.5 x 23 cm	
	Unit weight	7.8 lb. (3.6 Kg)	
	Shipping weight	10.6 lb. (4.8 Kg)	

Specifications and features are subject to change without notice.

