


T-LIGHT Bad-Ass Lightning Machine

85,000 Watts!



- Flash length from 1/30 sec to 3.5 sec.
- Stainless steel body lasts for years.
- DMX512 control.
- Optional controllers can execute pre-programmed or customized lightning sequences at the push of a button or triggered via DMX512.
- Beam is adjustable from spot to flood.
- Compact, fits into a Pelican™ case.
- Has internal and thermal circuit breaker and residual current operated circuit breaker.

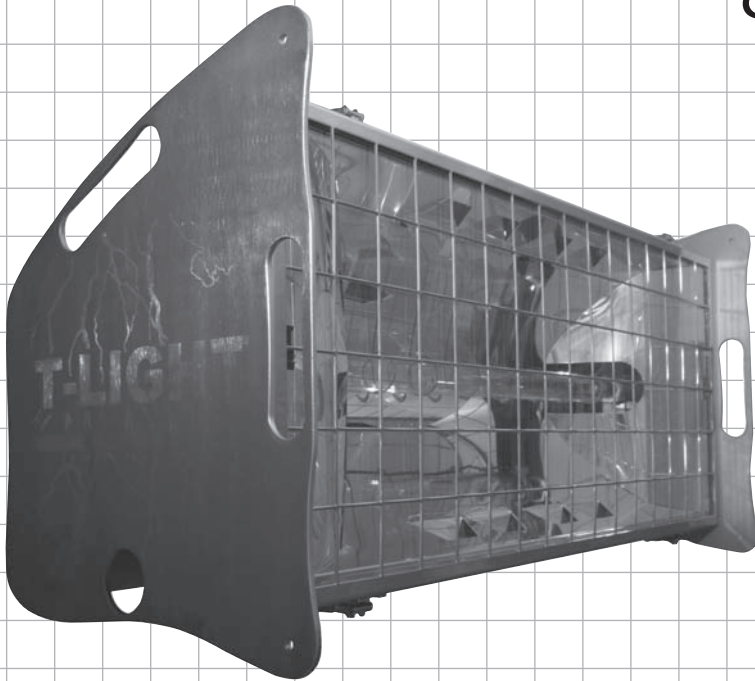

LOS ANGELES

10643 Glenoaks Blvd.
Pacoima, CA 91331
USA

Tel: +1 818.899.8818
Fax: +1 818.899.8813

LONDON

21 Armstrong Way
Southall
UB2 4SD England

Tel: +44 (0)20.8574.9700
Fax: +44 (0)20.8574.9701

NEW YORK

100 Asia Place
Carlstadt, NJ 07072
USA

Tel: +1 201.896.8600
Fax: +1 201.896.8601

BEIJING

No. 309, Building 6
Sanlitun Nanlu
Chaoyang District
Beijing, China 100027

Tel: +86 10.8492.1587
Fax: +86 10.8492.7635

TORONTO


409 Saddle St. West
Box 654, Durham
Ontario N0G-1R0

Tel: +1 519.369.9990
Fax: +1 519.369.9992

T-LIGHT SPECIFICATIONS

| | | |
|--|--|--|
| LAMP | Maximum continuous flash discharge | 3.5 sec |
| | Frequency of continuous mode | 120 Hz |
| | Flash tube type | Proprietary Long Arc Xenon Tube |
| | Colour temperature | 5600° Kelvin |
| CONTROL PARAMETERS | Intensity control | |
| | Adjustable flash frequency | |
| ELECTRONIC & SAFETY DEVICES | Overheating protection | 80°C, 110 °C, self resetting |
| | Self-test | Preprogrammed |
| | Indicator LED'S | Red: POWER Yellow: MODE/PROTECTION Green: DATA |
| CONTROL SYSTEM | Digital display and pushbutton programming of parameters | |
| | Number of channels | 2 |
| | Connection type | 5-Pin XLR |
| | Supported protocols | DMX512 |
| POWER SUPPLY | Nominal mains voltage | 230/240 V - 50/60 Hz |
| | Operating mains voltage | 160-250 V - 50/60 Hz |
| | Power requirement | 100A breaker |
| | Max. power draw | 350A |
| FIXTURE & HOUSING | Protection from breaking flash tube | Soft spring suspension system |
| | Fixing | Adjustable Yoke |
| | Corrosion protection | Stainless steel body |
| | Unit Dimensions (HxWxD) | 15" x 33" x 10" / 38 x 84 x 25 cm |
| | Shipping Dimensions (HxWxD) | 21" x 41" x 19" / 53 x 104 x 48 cm |
| | Unit Weight | 39 lb. / 17.7 kg |
| | Shipping Weight | 54 lb. / 24.5 kg |

Specifications and features are subject to change without notice.

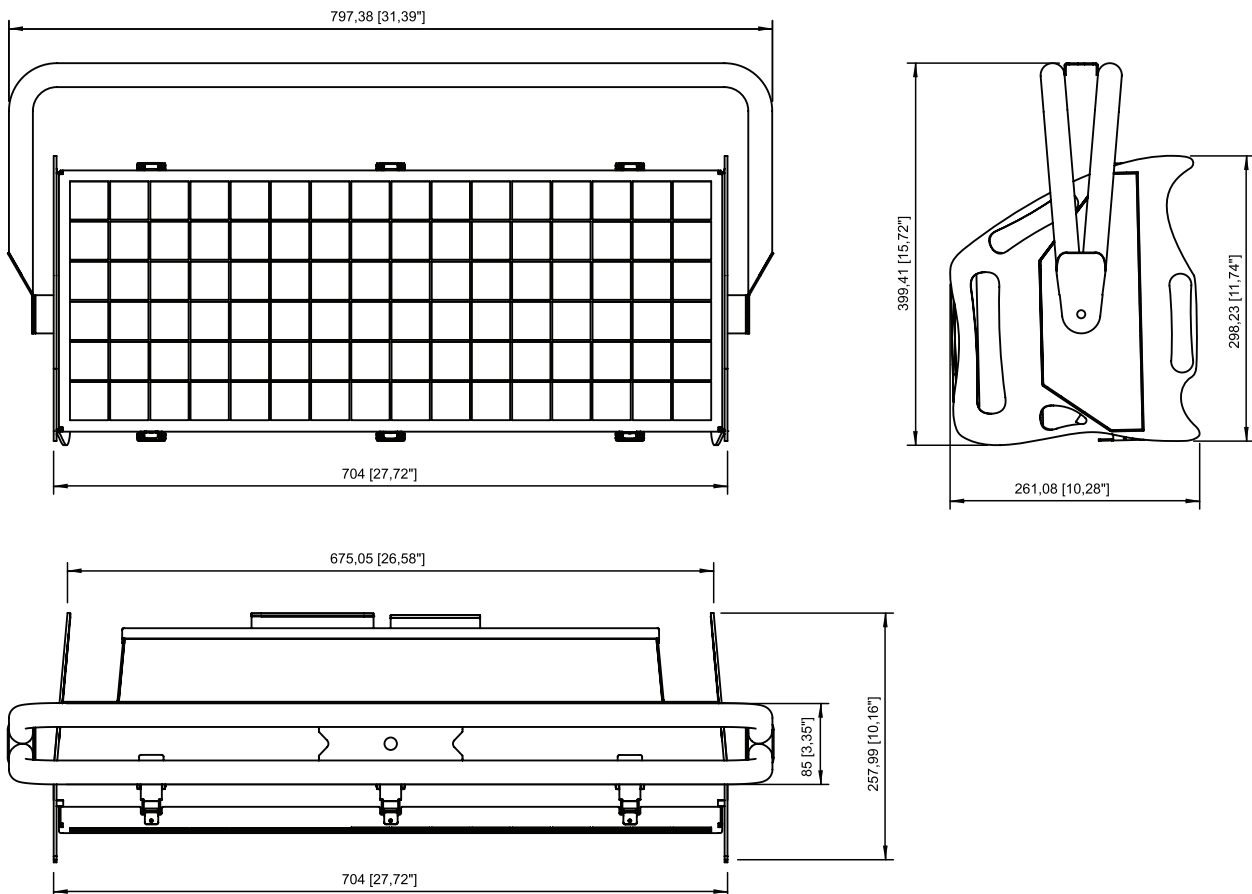

PRELIMINARY